



Advanced Validation Labs, Inc.

17665B Newhope Street, Fountain Valley, CA 92708 (714) 435-2630



Intel PCSD Server Memory Compatibility Test Certificate	
Test System: Intel S2600CP (Canoe Pass)	Test Result: Pass


Leveraged System(s): S2600WP Washington Pass; W2600CR Crown Pass; S2400SC Swiftcurrent Pass; S2400LP Lincoln Pass; S2600KI Kings Island; S1600JP Jackson Pass; S2400EP Eagle Pass; S2400BB Black Bear Pass; S1400FP Freemont Pass; S1400SP Salmon Pass; S2600IP Iron Pass; S2600CO Copper Pass.

Module Information									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KVR16LR11S4/8L	RDIMM	1.35V	8GB	1Gx72	1600	11	C	SR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
SK Hynix	H5TC4G43DFR-PBA	4Gb 1024Mx4bit 1637			IDT B		(1024Mx4)*72		

Leveraged Memory Modules						
	Vendor	Type	Voltage	CL	Speed	
1	Kingston	Type	1.35V	11	1600	
2	Kingston	Type	1.35V	11	1600	
3						
4						
5						
6						

System Configuration		
SETUP	System #1	System #2
AVL S/N	SN2311	SN6442
System S/N	QSCP13800398	QSCP14800221
Board Rev. (PBA)	E99552-401	G50768-501
CPU Type	E5-2680 v2 / 2.8 GHz	
Chipset	Intel C602	
BIOS / Date	02.06.0005 / 08/3/2016	
BMC / ME	01.27.9958 / 02.01.07.328	
FRU/SDR	1.13 / 1.11	
OS	Windows 2008 Enterprise R2 64bit SP1	
Test Tool	iWVSS 2.6.5, SELViewer, Pvmode2, Syscfg, WinPIRA, MemPuller	

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	Done
2. SPD Check	DIMM SPD content check for JEDEC compliance	Pass
3. Memory Stress	Test for 6 hours @ Max and Min Loading	HVDD Hot Pass
4. Memory Stress		HVDD Cold Pass
5. Memory Stress		LVDD Hot Pass
6. Memory Stress		LVDD Cold Pass
Note:		

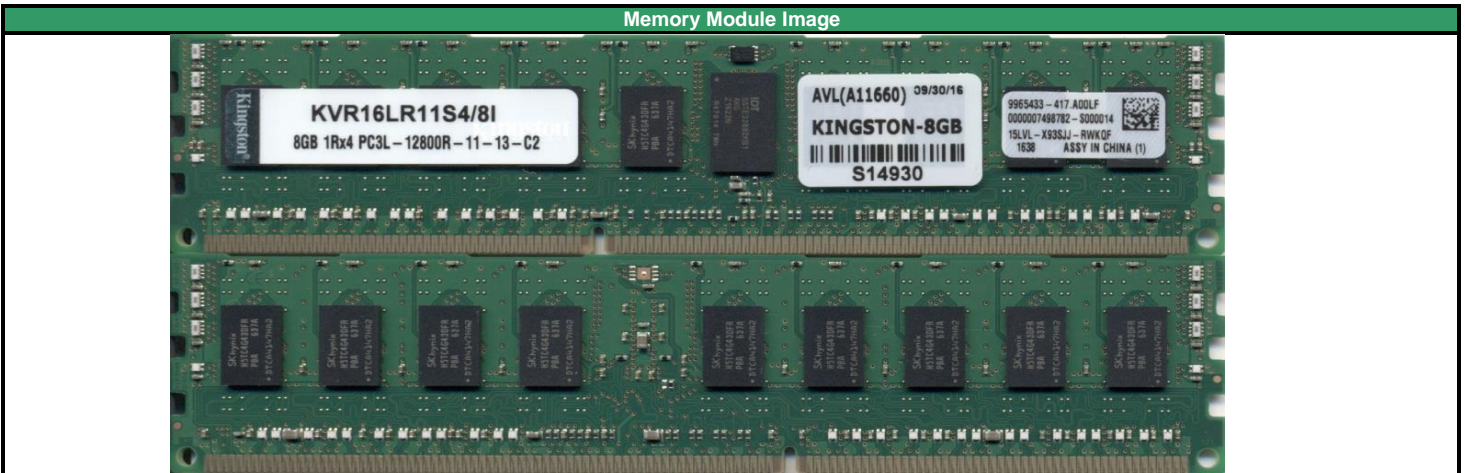

AVL USE ONLY:							
Completed by:	Andy Chang	Completion Date:	01/25/2017	AVL A#	A11660	AVL W/O	WD6976
Comments:							

Test Results

4C					
Minimum Loading					
Start Date		11/7/2016			
DIMM Voltage		1.5v			
DIMM	S/N	A	B	C	D
CPU1 A1	S14964	P	P	P	P
CPU1 A2					
CPU1 B1	S14965	P	P	P	P
CPU1 B2					
CPU1 C1	S14966	P	P	P	P
CPU1 C2					
CPU1 D1	S14967	P	P	P	P
CPU1 D2					
CPU2 E1	S14968	P	P	P	P
CPU2 E2					
CPU2 F1	S14969	P	P	P	P
CPU2 F2					
CPU2 G1	S14970	P	P	P	P
CPU2 G2					
CPU2 H1	S14971	P	P	P	P
CPU2 H2					

4C					
Maximum Loading					
Start Date		11/07/16			
DIMM Voltage		1.5v			
DIMM	S/N	A	B	C	D
CPU1 A1	S14964	P	P	P	P
CPU1 A2	S14965	P	P	P	P
CPU1 B1	S14966	P	P	P	P
CPU1 B2	S14967	P	P	P	P
CPU1 C1	S14968	P	P	P	P
CPU1 C2	S14969	P	P	P	P
CPU1 D1	S14970	P	P	P	P
CPU1 D2	S14971	P	P	P	P
CPU2 E1	S14972	P	P	P	P
CPU2 E2	S14973	P	P	P	P
CPU2 F1	S14974	P	P	P	P
CPU2 F2	S14975	P	P	P	P
CPU2 G1	S14976	P	P	P	P
CPU2 G2	S14977	P	P	P	P
CPU2 H1	S14978	P	P	P	P
CPU2 H2	S14979	P	P	P	P

4C					
Minimum Loading					
Start Date		11/7/2016			
DIMM Voltage		1.35v			
DIMM	S/N	E	F	G	H
CPU1 A1	S14964	P	P	P	P
CPU1 A2					
CPU1 B1	S14965	P	P	P	P
CPU1 B2					
CPU1 C1	S14966	P	P	P	P
CPU1 C2					
CPU1 D1	S14967	P	P	P	P
CPU1 D2					
CPU2 E1	S14968	P	P	P	P
CPU2 E2					
CPU2 F1	S14969	P	P	P	P
CPU2 F2					
CPU2 G1	S14970	P	P	P	P
CPU2 G2					
CPU2 H1	S14971	P	P	P	P
CPU2 H2					

4C					
Maximum Loading					
Start Date		11/07/16			
DIMM Voltage		1.35v			
DIMM	S/N	E	F	G	H
CPU1 A1	S14964	P	P	P	P
CPU1 A2	S14965	P	P	P	P
CPU1 B1	S14966	P	P	P	P
CPU1 B2	S14967	P	P	P	P
CPU1 C1	S14968	P	P	P	P
CPU1 C2	S14969	P	P	P	P
CPU1 D1	S14970	P	P	P	P
CPU1 D2	S14971	P	P	P	P
CPU2 E1	S14972	P	P	P	P
CPU2 E2	S14973	P	P	P	P
CPU2 F1	S14974	P	P	P	P
CPU2 F2	S14975	P	P	P	P
CPU2 G1	S14976	P	P	P	P
CPU2 G2	S14977	P	P	P	P
CPU2 H1	S14978	P	P	P	P
CPU2 H2	S14979	P	P	P	P