
	AVL Supermicro server platform Memory Module Qualification Test		
	Intel X5650(WSM) x 2, Intel 5520 (Tylersburg), Rev C2	Test Results	Pass
	PN: KVR13LR9D4/16HA (16GB / RDIMM / ECC) On: X8DTT-F Rev.1.02		

RP77D3x-128-KI-SQ-SMC-V2		Module Information		Rev 04/25/2013
AVL WorkOrder #	WC6815	AVL A#	9077	
Start Date	6/18/2013	End Date	6/20/2013	
Tested By	Van N.			
Module Manufacturer	Kingston			
Module Part Number	KVR13LR9D4/16HA			
Module BOM Number	9965516-137.A00LF			
Module Capacity / Memory Type / ECC	16GB / RDIMM / ECC			
Module Configuration (Width, # of devices, # of Ranks)	2Gx72 /36 Devices / 2 Ranks			
Module Speed (Data rate of Mbps, CL-tRP-tRCD)	DDR3L-1333 /9-9-9			
DRAM Device Vendor	Hynix			
DRAM Device Part Number / Date code	H5TC4G43AFR-PCA		1250	
DRAM Die Revision / Process Technology (nm)	A			
DRAM Device Config (Density / Width)	4Gbit / x4		/1024MX4bit	
Thermal Sensor Device Vendor / Part Number / Revision	STMicro			
Register Device Vendor / Part Number / Revision	Inphi	INSSTE32882UV-GS02	2.1	



Platform System Information				
Motherboard Info (Model# & MB Revision & MB S/N & AVL S/N)	X8DTT-F	1.02	OM03S39747	SK4376
BISO Revision / BIOS Date / MRC Rev.	2.0c	8/30/2011		
CPU / Speed	Intel X5650(WSM) x 2		2.66GHz	
Chipset info (Stepping)	Intel 5520 (Tylersburg), Rev C2			

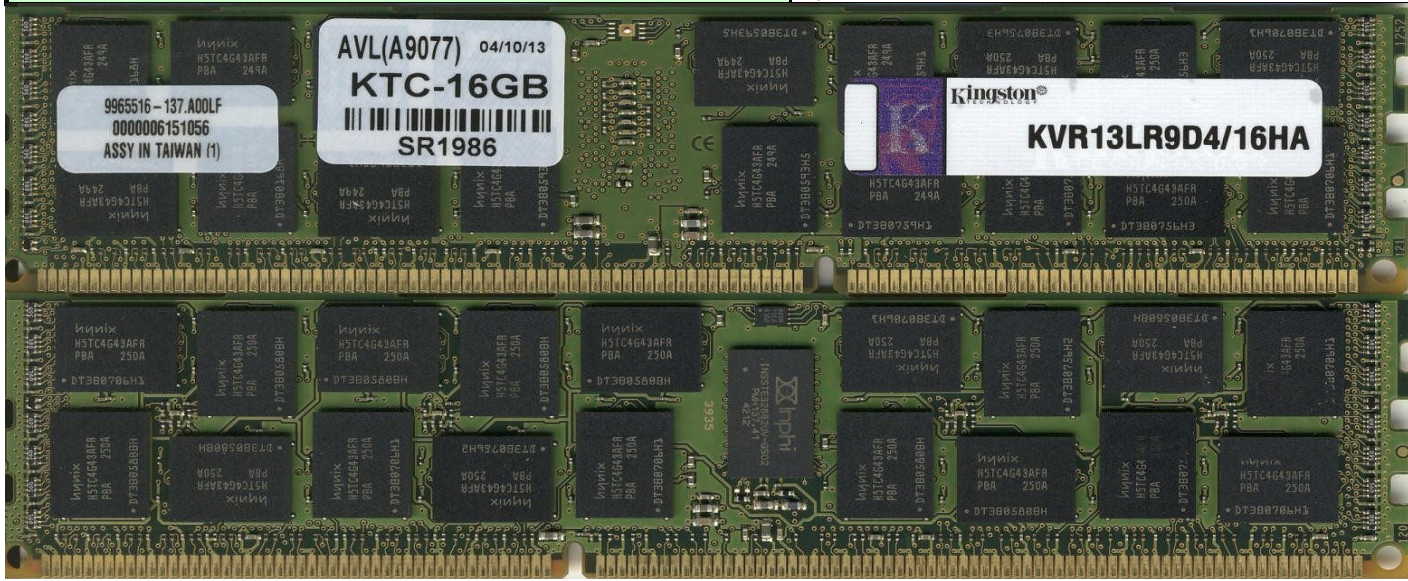

AVL Supermicro server platform Memory Module Qualification Test

Intel X5650(WSM) x 2, Intel 5520 (Tylersburg), Rev C2

PN: KVR13LR9D4/16HA (16GB / RDIMM / ECC) On: X8DTT-F Rev.1.02

Test Results:

PASS

Comments:

AVL Memory Module Qual Test Results Summary

Test # and name	Test Description	Specs	Test Results	Comments
1. Latest BIOS Upgrade & Configuration	Download / Upgrade latest BIOS & record size and speed detection	Per test platform, DIMM & config spec	Done	Record memory size & speed at each test only
2. SPD Check	Memory module SPD content check for JEDEC compliance	JEDEC	Pass	Use proprietary tools
3. Reset Cycle	Run Linux based diags & utility software @55°C	50 loops	Pass	1 DIMM Per Channel when applicable
4a. Stress Application Test	Run Linux based diags & utility software @55°C	8 Hour per config	Pass	DIMM Loading per spec
4b. Stream Benchmark Test		5 loop per config	Pass	DIMM Loading per spec
4b. Reset Cycle		200 loop per config	Pass	DIMM Loading per spec
5. Functional Stress Test	Memory Stress Test @55°C	12hrs	Pass	DIMM Loading per spec
6. Stress Application Test	Run Linux based diags & utility software @55°C	8hrs	N/A	3 DIMM Per Channel when applicable

Note: All test under IMC Vdd=Nom, Vref=Vddnom/2