
	AVL Supermicro server platform Memory Module Qualification Test		
	Intel X5650(WSM) x 2, Intel 5520 (Tylersburg), Rev C2	Test Results	Pass
	PN: KVR1333D3LD4R9S/8GEC (8GB / RDIMM / ECC) On: X8DTU Rev.2.01		

RP77D3x-106-KI-SQ-SMC-V1		Module Information		Rev 01/07/2011
AVL WorkOrder #	WB9995	AVL A#	6987	
Start Date	6/23/2011	End Date	7/1/2011	
Tested By	Mike H.			
Module Manufacturer	Kingston			
Module Part Number	KVR1333D3LD4R9S/8GEC			
Module BOM Number	9965516-004.A00LF			
Module Capacity / Memory Type / ECC	8GB / RDIMM / ECC			
Module Configuration (Width, # of devices, # of Ranks)	1Gx72 /36 Devices / 2 Ranks			
Speed Tested (Data rate of Mbps, CL-tRP-tRCD)	DDR3-1333 /9-9-9			
DRAM Device Vendor	Elpida			
DRAM Device Part Number / Date code	EDJ2104ECSE-DJ-F	1112		
DRAM Die Revision / Process Technology (nm)	C-Die	40		
DRAM Device Config (Density / Width)	2Gbit	/ x4		
Thermal Sensor Device Vendor / Part Number / Revision				
Register Device Vendor / Part Number / Revision	Inphi	TE32882	LV-GS09	



Platform System Information				
Motherboard Info (Model# & MB Revision & MB S/N & AVL S/N)	X8DTU	2.01	VM06SG3312	SK4374
BISO Revision / BIOS Date / MRC Rev.	2.0c	1/5/2011	2.21	
CPU / Speed	Intel X5650(WSM) x 2		2.66GHz	
Chipset info (Stepping)	Intel 5520 (Tylersburg), Rev C2			

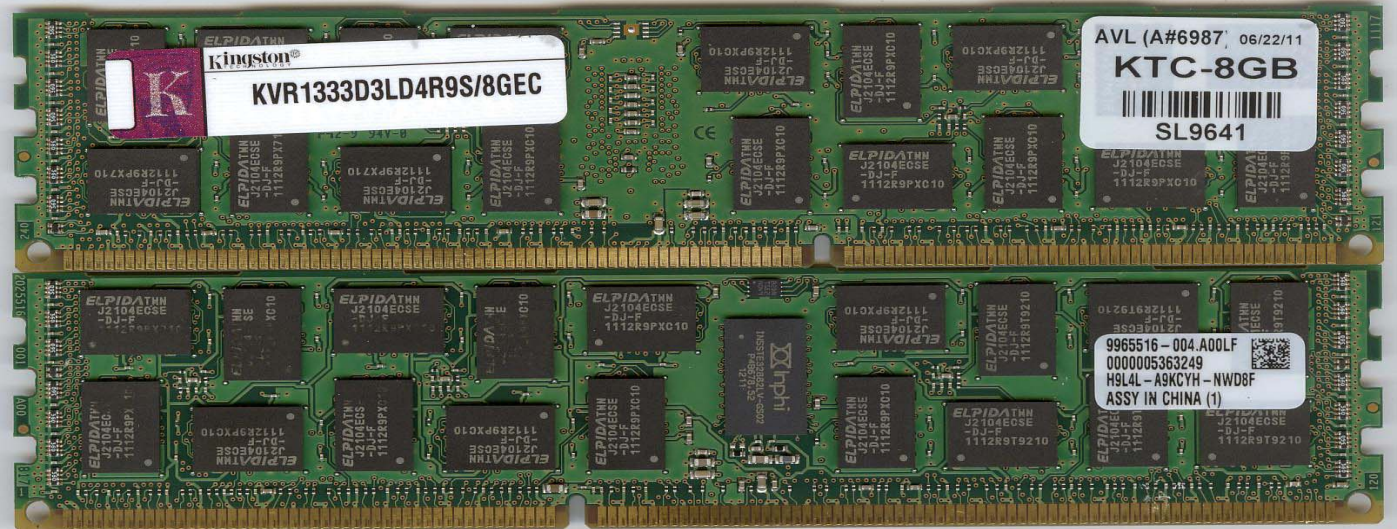

AVL Supermicro server platform Memory Module Qualification Test

Intel X5650(WSM) x 2, Intel 5520 (Tylersburg), Rev C2

PN: KVR1333D3LD4R9S/8GEC (8GB / RDIMM / ECC) On: X8DTU Rev.2.01

Test Results:

PASS

Comments:

AVL Memory Module Qual Test Results Summary

Test # and name	Test Description	Specs	Test	Comments
			Results	
1. Latest BIOS Upgrade & Configuration	Download / Upgrade latest BIOS & record size and speed detection	Per test platform, DIMM & config spec	Done	Record memory size & speed at each test only
2. SPD Check	Memory module SPD content check for JEDEC compliance	JEDEC	Pass	Use proprietary tools
3. Sisoftware Sandra Benchmark	Run Windows based diags & utility software @55°C - DIMM max loading. Test run under 1.35v	1 loop per config	Done	Force 1066 in BIOS
4. Passmark Burn-In		12 Hour per config	Pass	Force 1066 in BIOS
5a. Stress Application Test	Run Linux based diags & utility software @55°C - DIMM max loading. Test run under 1.35v	12 Hour per config	Pass	Force 1066 in BIOS
5b. Stream Benchmark Test		5 loop per config	Done	Force 1066 in BIOS
5c. Reset Cycle		500 loop per config	Pass	Force 1066 in BIOS
6. Functional Stress Test (Corner 1)	Run RST Premium @55°C - 1 DIMM Per Ch Test run under 1.35v 1333	8 Hour or 2+ Loops per config	Pass	Run @ Max module speed
7. Functional Stress Test (Corner 2)	Run RST Premium @55°C - 2 DIMM Per Ch Test run under 1.5v	8 Hour or 2+ Loops per config	Pass	Full Load
8. Functional Stress Test (Corner 3)	Run RST Premium @0°C1 DIMM Per Ch Test run under 1.35v 1333	8 Hour or 2+ Loops per config	Pass	Run @ Max module speed

Note: All test under IMC Vdd=Nom, Vref=Vddnom/2