

**Server Memory Compatibility Test Certificate**

Test System: <b>Supermicro X9SRE-F</b>	Test Result: <b>Pass</b>
--	--------------------------


Leveraged System(s): X9SRA, X9SRi, X9SRI-F, X9SRE, X9SRG-F, X9SRW-F, X9SRW-3F

Module Specifications									
DIMM Vendor	DIMM Part Number	Type	Voltage	Size	Config.	Speed	CL	R/C	Rank
Kingston	KVR16LR11D8/8HB	RDIMM	1.35V	8GB	1Gx72	1600	11	B	DR
DRAM Vendor	DRAM Part Number	DRAM Density / Width / Date Code			Register Vendor / Rev.		DIMM Composition		
Sk Hynix	H5TC4G83BFR-PBA	4Gb	512Mx8bit	1509	IDT	6.3	(512Mx8)*72		

System Configuration	
SETUP	System Information
AVL S/N	SO6530
System S/N	ZM23U39156
Board Rev. (PBA)	1.2
CPU Type	Intel E5-2650(IVB) x 1
Chipset	Intel C602
BIOS / Date	3.0a /1/3/2014
BMC / ME	2.14
FRU/SDR	n/a
OS	Red Hat Enterprise Linux 6.2 Kernel 2.6.32
Test Tool	SAT, Memory Stress v1077

Testing Summary		
Test Items	Test Description	Test Results
1. Latest BIOS Upgrade & Configuration check	Record memory Size and Speed detection from BIOS	<b>Done</b>
2. SPD Check	DIMM SPD content check for JEDEC compliance	<b>Pass</b>
3. Reset Cycle	1 DIMM Per Channel when applicable	<b>Pass</b>
4a. Memory Stress	DIMM Loading per spec	8 hours per config
4b. Memory Benchmark		5 loops per config
4c. Reset Cycle		200 loops per config
5. Functional Stress Test		12 hours
		<b>Pass</b>

Note:

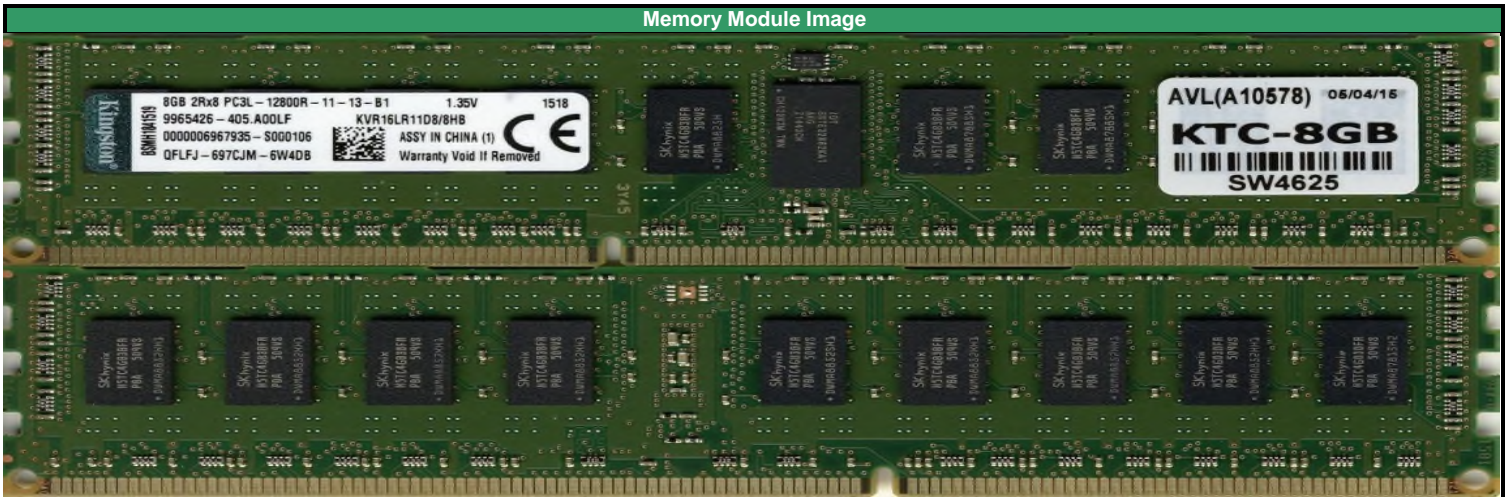

AVL USE ONLY:							
Completed by:	Van Nguyen	Completion Date:	5/12/2015	AVL A#	10578	AVL W/O	WD3557
Comments:							